


DC116W

Wind-sun Sensor Specification

Version NO. : A/01

T Wind-sun sensor specification

Technical support

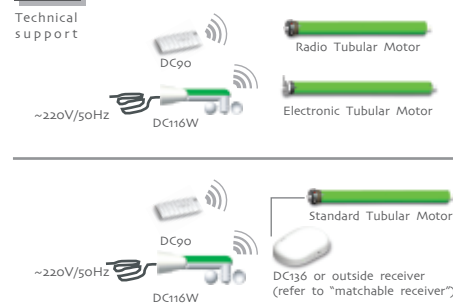

- Stable performance
- Frequency: 433.92MHz
- Range of validity: outdoor 200 meters
- 2 screws fixed
- AC power: 220V/50Hz
- Safety code (50 million times without repeat,high security)
- Can set four different wind scales and four different sunlight ranks
- When the wind power is more than the setting value for 3 seconds, the sensor will automatically close awning. After closed, the sensor will not the wind in three minute.
- When the light level is more than the setting value for 2 minutes, the sensor will automatically unfolds awning. When the light level does not reach the setting value for 15 minutes, the sensor will automatically close awning.


Note: Make sure to confirm that sensor has been programmed with the supporting receiver before use.

T Matchable receiver

Technical support



Button specification

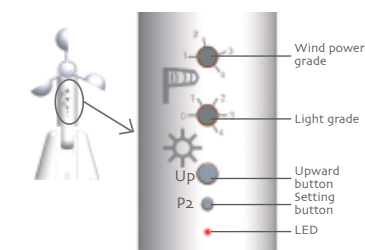

T The best installation distance

Technical support

